

DESCRIPTION

- LED clock for outdoor installation.
- Hours, minutes and seconds display.
- When the optional timer control unit is used, it is possible to display either the local time or the timer count (up, down, split...) but also the local time and the timer count alternatively.
- Height of digit 12 cm, optimal viewing distance: 45 metres.
- LED colours: red, yellow.
- Models: independent, impulse, wireless DCF, wireless DHF and AFNOR.



See product page on
>> www.bodet-time.com <<

STANDARDS

- EMC: - EN55032.
- EN55024.
- LVD: EN60950.
- R&TTE (radio models): EN301-489-3.

GENERAL FEATURES

- **Adjustable brightness**..... Automatic photo cell.
- **Display mode**..... 24 hours.
- **Time change**..... Automatic when the clock is synchronised by an external source. No change over when independent.
- **Data saving**..... 3 days.
- **Time accuracy**..... 0.2 second/day.
- **Operation**..... Silent.
- **Digit**..... 7 segments with 9 LED each for hour – minute and 7 segments with 7 LED each for second.
- **Hours and minutes separating**..... Colon made of 4 LEDs.
- **Configuration**..... 2 buttons.
- **Electronics**..... Tropicalised electronics.

MECHANICAL FEATURES

- **Construction**..... Matte black aluminium casing. (IP53, IK07 - window in polycarbonate shock-proof).
- **Operating temperature range**..... -30 to +60°C.
- **Weight** 6.3 Kg.
- **Dimensions**..... 725 x 240 x 90.5 mm (see on the back).

ELECTRICAL FEATURES

- **Power supply**..... 230VAC.
- **Consumption**..... 85 mA.
- **Electric protection**..... Class 1.

MOUNTING ACCESSORIES

- **935 005**..... Adaptation support Style 12Se V1 V2.
- **935 007**..... Single or double sided bracket.
- **935 009**..... Back cover (single-sided mounting on pole).
- **935 012**..... Cable Kit for double sided

STYLE 12Se REFERENCES


- **935 B1x**..... Independent / impulse receiver
- **935 B2x**..... IRIG-B/AFNOR coded time receiver
- **935 B6x**..... Radio synchronised DCF signal
- **935 B7x**..... Wireless DHF receiver

• Indicate LED colour by choosing the "x" of the reference:

1: red or 3: yellow



WALL MOUNTING

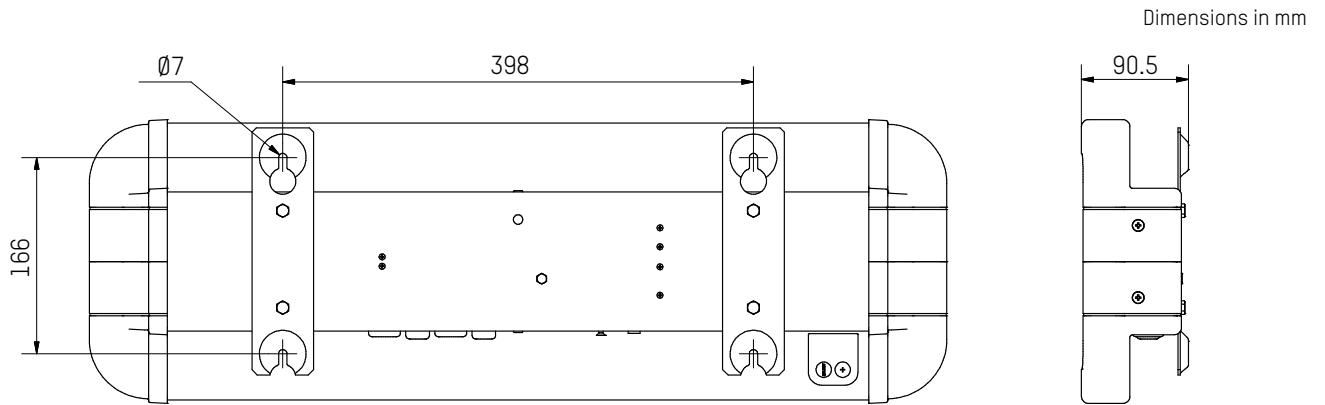

MOUNTING ON HANGING BRACKET

- The hanging bracket makes possible to hang the clock from the ceiling or from the wall.

Dimensions in mm

